




3 SDMC



L90 / 60.000Hrs

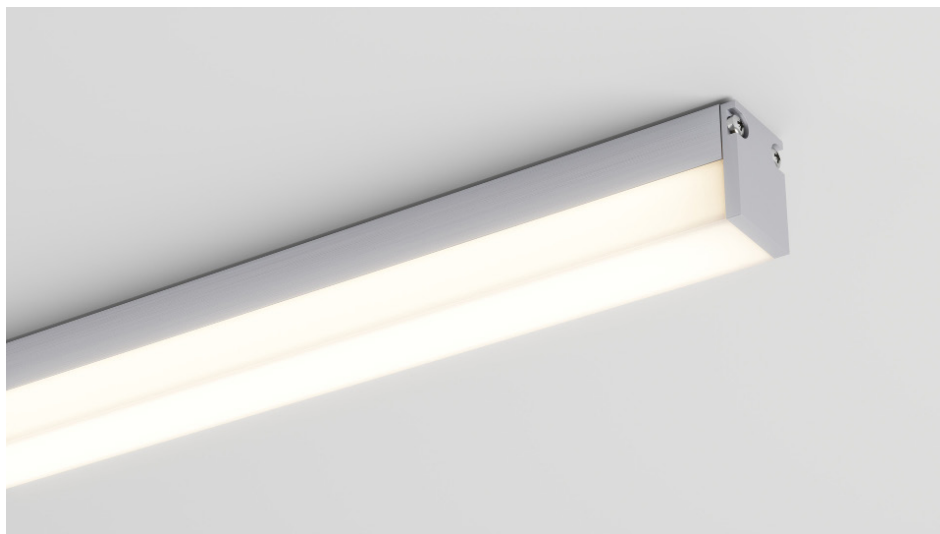

0,30 Kg/m



BE_LINE Edge 1824



IP20

DIMM



NOME / NAME

LIME1824

Apparecchio monoemissione per illuminazione lineare / Single emission fixture for linear lighting

DIMENSIONI / DIMENSION

LED TYPE: SUPPLY: CRI:	White 24Vdc CRI>90	White 48Vdc CRI>90	White 24Vdc Full Spectrum	White 48Vdc Full Spectrum	DW 24Vdc CRI>90	RGB+W 24Vdc CRI>90
	25mm	50mm	50mm	100mm	50mm	50mm
MIN. [mm]:	0045	0070	0070	0120	0070	0070
MAX. [mm]:	2995	2970	2970	2920	2970	2970

INSTALLAZIONE / INSTALLATION

20 Indoor IP20

SCHERMO-OTTICA / COVER-OPTIC

OP Opale / Opal

FINITURA / FINISHING *

PI1	Vern. polvere Bianco RAL9010 Powder coating White RAL9010	PL1	Vern. polvere Nero RAL9005 Powder coating Black RAL9005	AG0	Anodizzato Grigio Anodized Grey
PC1	Vern. polvere Rosso Powder coating Red	PB1	Vern. polvere Arancio Powder coating Orange	PA4	Vern. polvere Giallo Powder coating Yellow
PE1	Vern. polvere Blu Powder coating Blue	PF1	Vern. polvere Verde Powder coating Green	PH1	Vern. polvere Marrone Powder coating Brown
BG0	Alluminio Brillantato Grigio Polished Grey Aluminum				

(*) Su richiesta sono disponibili ulteriori colori RAL / Additional RAL colour are available on demand

CARATTERISTICHE TECNICHE / TECHNICAL DATA

WHITE (1 CH)	Cod.	CV [Vdc]	W/m	Lm/m		Cod.	CCT	CRI
				CRI >90	Full Spectrum			
	W2412	24	12	1502	1502	279	2700 K	> 90
	W2418	24	18	2253	2253	309	3000 K	> 90
	W2424	24	24	3004	3004	359	3500 K	> 90
	W4812	48	12	1502	1502	409	4000 K	> 90
	W4818	48	18	2253	2253	579	5700 K	> 90
	W4824	48	24	3004	3004	27H	2700 K	Full Spectrum
					30H	3000 K	Full Spectrum	
					35H	3500 K	Full Spectrum	
					40H	4000 K	Full Spectrum	
					50H	5000 K	Full Spectrum	

DW (2 CH)	Cod.	CV [Vdc]	W/m	Lm/m	Cod.	CCT	CRI
	D2412	24	12	1502	DA9	2700-4000K	> 90
	D2418	24	18	2235	DB9	2700-5700K	> 90
	D2424	24	24	3004			

RGB+W (4 CH)	Cod.	CV [Vdc]	W/m	Lm/m (white)	Cod.	CCT (White)	CRI (White)
	X2412	24	12 + 12	1288	RA9	RGB+2700K	> 90
	X2418	24	18 + 18	1932	RB9	RGB+3000K	> 90
	X2424	24	24 + 24	2575			

Condizioni / Conditions: Flux BIN P10 - Ta: 25°C


ESEMPIO DI CODICE / EXAMPLE OF CODE

CODICE: **LIME1824102020OPPI1W2430309**

DESCRIZIONE: **BE LINE Edge 1824**
Apparecchio monoemissione per illuminazione lineare, sez. 18x24mm, L:1020mm, IP20 Indoor, corpo estruso in alluminio, verniciato a polvere bianco RAL9010 opaco, diffusore policarbonato V0 opale LED WHITE 24W/m, CV 24V, 3000K 3SDCM CRI>90, piattina doppio isolamento da 1m (2x0,75mm²), Cl.III




DISEGNO / DRAWING

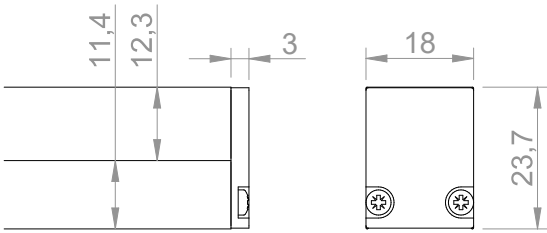

Unita di misura: mm / Unit of Measurement: mm

GRAFICO POLARE / POLAR GRAPH

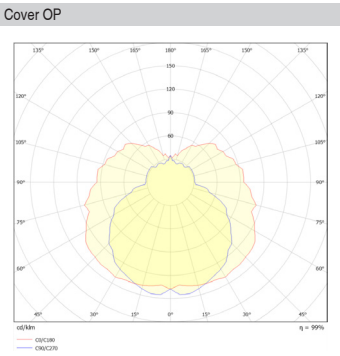

ACCESSORI / ACCESSORIES

SOFFITTO / CEILING: Cod. **LM0003**
PARETE / WALL: Cod. **LM0003**

