

3 SDMC



L90 / 60.000Hrs



0,70 Kg/m



## BE\_LINE Edge 3045



### NOME / NAME

**LIMR3045** Apparecchio monoemissione per illuminazione lineare / Single emission fixture for linear lighting

### DIMENSIONI / DIMENSION

LED TYPE:	White	White	White	White	DW	RGB+W
SUPPLY:	24Vdc	48Vdc	24Vdc	48Vdc	24Vdc	24Vdc
CRI:	CRI>90	CRI>90	Full Spectrum	Full Spectrum	CRI>90	CRI>90
	25mm	50mm	50mm	100mm	50mm	50mm
MIN. [mm]:	<b>0045</b>	<b>0070</b>	<b>0070</b>	<b>0120</b>	<b>0070</b>	<b>0070</b>
MAX. [mm]:	<b>2995</b>	<b>2970</b>	<b>2970</b>	<b>2920</b>	<b>2970</b>	<b>2970</b>

### INSTALLAZIONE / INSTALLATION

20 Indoor IP20

### SCHERMO-OTTICA / COVER-OPTIC

OP Opale / Opal

### FINITURA / FINISHING \*

<b>PI1</b>	Vern. polvere Bianco RAL9010 Powder coating White RAL9010	<b>PL1</b>	Vern. polvere Nero RAL9005 Powder coating Black RAL9005	<b>AG0</b>	Anodizzato Grigio Anodized Grey
<b>PC1</b>	Vern. polvere Rosso Powder coating Red	<b>PB1</b>	Vern. polvere Arancio Powder coating Orange	<b>PA4</b>	Vern. polvere Giallo Powder coating Yellow
<b>PE1</b>	Vern. polvere Blu Powder coating Blue	<b>PF1</b>	Vern. polvere Verde Powder coating Green	<b>PH1</b>	Vern. polvere Marrone Powder coating Brown
<b>BG0</b>	Alluminio Brillantato Grigio Polished Grey Aluminum				

(\*) Su richiesta sono disponibili ulteriori colori RAL / Additional RAL colour are available on demand

**CARATTERISTICHE TECNICHE / TECHNICAL DATA**

	Cod.	CV [Vdc]	W/m	Lm/m		Cod.	CCT	CRI
				CRI >90	Full Spectrum			
WHITE (1 CH)	W2412	24	12	1502	1502	279	2700 K	> 90
	W2418	24	18	2253	2253	309	3000 K	> 90
	W2424	24	24	3004	3004	359	3500 K	> 90
	W2430	24	30	3756	3756	409	4000 K	> 90
	W2440	24	40	5008	-	579	5700 K	> 90
	W4812	48	12	1502	1502	27H	2700 K	Full Spectrum
	W4818	48	18	2253	2253	30H	3000 K	Full Spectrum
	W4824	48	24	3004	3004	35H	3500 K	Full Spectrum
	W4830	48	30	3756	3756	40H	4000 K	Full Spectrum
	W4840	48	40	5008	-	50H	5000 K	Full Spectrum
	DW (2 CH)	D2412	24	12	1502		DA9	2700-4000K
D2418		24	18	2235		DB9	2700-5700K	> 90
D2424		24	24	3004				
D2430		24	30	3756				
RGB+W (4 CH)	X2412	24	12 + 12	1288		RA9	RGB+2700K	> 90
	X2418	24	18 + 18	1932		RB9	RGB+3000K	> 90
	X2424	24	24 + 24	2575				

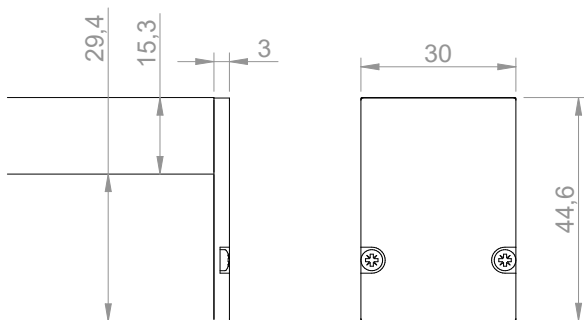
Condizioni / Conditions: Flux BIN P10 - Ta: 25°C

**ESEMPIO DI CODICE / EXAMPLE OF CODE**


 CODICE: **LIMR3045102020OPPI1W2440309**

 DESCRIZIONE: **BE\_LINE Rectangle 3045**

Apparecchio monoemissione per illuminazione lineare, sez. 30x45mm,  
 L:1020mm, IP20 Indoor, corpo estruso in alluminio, verniciato a polvere bianco  
 RAL9010 opaco, diffusore policarbonato V0 opale  
 LED WHITE 40W/m, CV 24V, 3000K 3SDCM CRI>90, piattina doppio isolamento  
 da 1m (2x0,75mm<sup>2</sup>), Cl.III


**DISEGNO / DRAWING**


Unita di misura: mm / Unit of Measurement: mm

**GRAFICO POLARE / POLAR GRAPH**

**ACCESSORI / ACCESSORIES**

 SOFFITTO / CEILING: Cod. **LICW01**

 PARETE / WALL: Cod. **LICW01**
